

## GUNOLA STREET NB

### STREET LIGHT



#### Areas of application

- Collection Roads
- Main Roads
- Logistic Areas
- Urban Areas
- Parks
- Open Carparks
- Airports

#### Product benefits

- Efficient energy saving
- Elegant design
- Easy installation system

#### Product specifications

- Lifetime (L70/B50) : up to 50,000 h
- Color temperature : 2,700 K - 6,500 K
- Operating voltage : 220...240 V AC supply
- Type of protection : IP67
- Pole mounting
- Led type : Samsung - Cree
- Driver : Meanwell



IP 67



## Product datasheet

### Technical data


#### Electrical data

|                           |             |
|---------------------------|-------------|
| Nominal wattage           | 85 W        |
| Nominal voltage           | 220 - 240 V |
| Power factor              | > 0.9       |
| Lumen / Watt              | 129 lm/watt |
| Total harmonic distortion | < %20       |
| Mains frequency           | 50...60 Hz  |

#### Photometrical data

|                          |                 |
|--------------------------|-----------------|
| Color temperature        | 2700 K - 6500 K |
| Luminous flux            | 10980 lm        |
| Color rendering index Ra | > 80            |

#### Dimensions

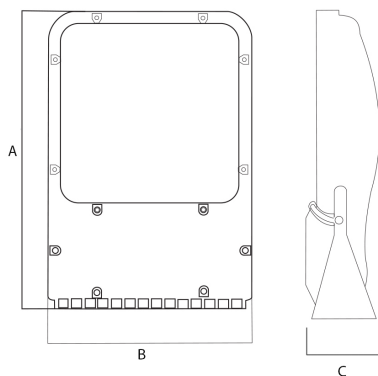

|   |        |
|---|--------|
| A | 330 mm |
| B | 230 mm |
| C | 70 mm  |

#### Colors & materials

|               |                            |
|---------------|----------------------------|
| Body material | Aluminum die cast          |
| Product color | Electrostatic powder paint |



Note : Product body paint can be ordered with other RAL codes.

#### Temperatures & operating conditions

|                           |                |
|---------------------------|----------------|
| Ambient temperature range | -25 ... +85 °C |
|---------------------------|----------------|

Light Tecnical Data

|            |                     |
|------------|---------------------|
| Beam angle | Narrow distribution |
|------------|---------------------|

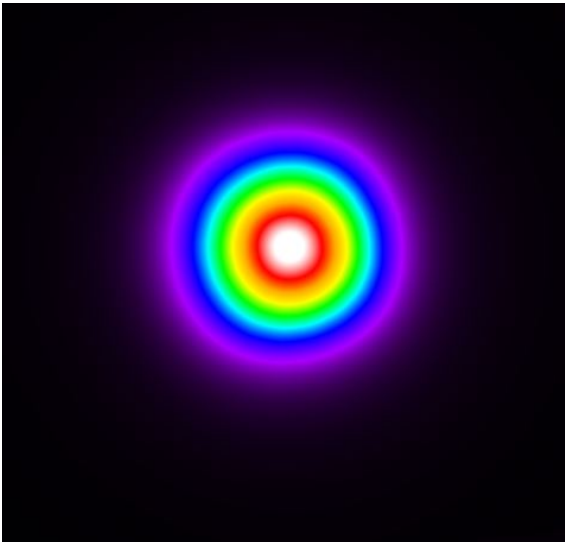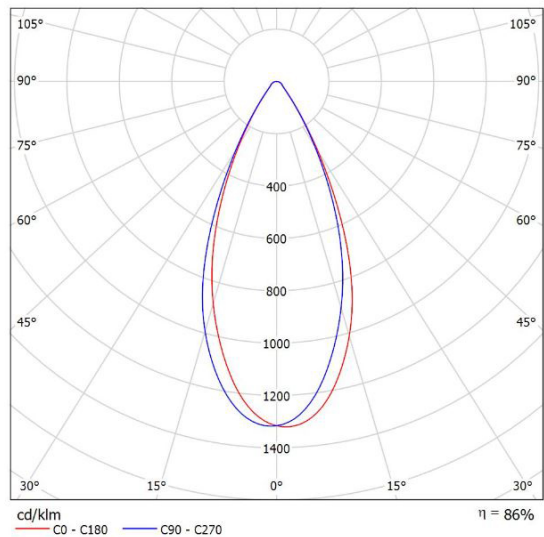

|               |                |
|---------------|----------------|
| Type of cover | Tempered glass |
|---------------|----------------|

Capabilities

|                      |                                 |
|----------------------|---------------------------------|
| Type of installation | With lighting pole              |
| Type of connection   | Cable, 3 x 1.50 mm <sup>2</sup> |

Certificates & standards

|                    |                                        |
|--------------------|----------------------------------------|
| Protection class   | Insulation class I (safety insulation) |
| Type of protection | IP67                                   |