

# TANK COMPACT SERIES RISING BOLLARD



Designed with durable body for security needed locations by using hydraulic system technology.

Rising Bollard with led on top which is built-in hydraulic unit is ergonomic product and it is highly withstand for heavy duty operations.

Moving part of this product can reach from 50 cm height up to 70 cm as a standard.


Tank Compact series rising bollards are produced as fully comply with every kind of access control systems.

In chassis of rising bollard used high quality steels. Its hydraulic unit has exclusive brands valves.

## General Informations and Standards

- ▶ BOSS 800 control panel
- ▶ Outer body is painted
- ▶ Operation speed is 5-8 second
- ▶ 100% heavy duty cycle
- ▶ Fully compliant for access control systems
- ▶ Double contact loop detector
- ▶ Manual Release with special key
- ▶ High performance working
- ▶ Fully safe and reliable operation
- ▶ Remote control and receiver system
- ▶ LED system on top for day/night visible
- ▶ 2 years warranty

## Product Details

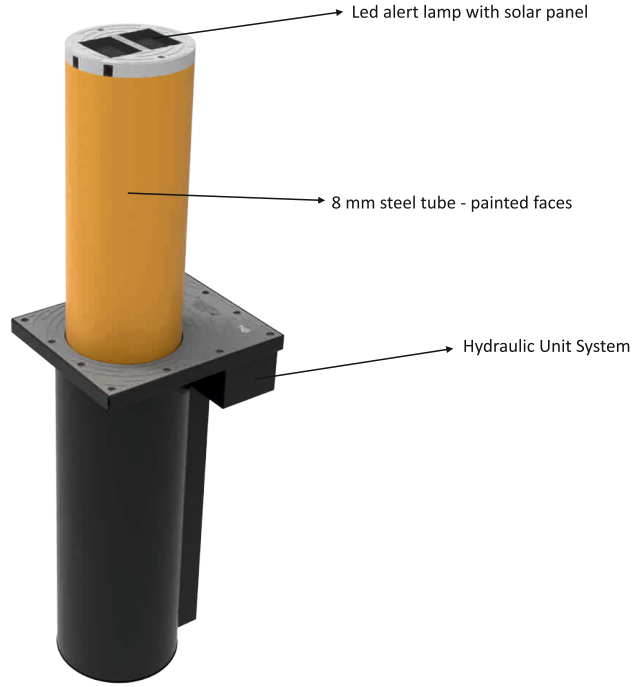

**Technical Datasheet**

Type	
Working System	Hydraulic
Motor Power	0,25 Kw
Working Pressure Min.	20 Bar
Working Pressure Max.	40 Bar
Power Supply	220V / 50-60 Hz
Rising Speed	10 cm / sec
Lowering Speed	20 cm / sec
Moving Cylinder Nominal Diameter	273 mm
Moving Cylinder Height	500 - 600 - 700 mm
Moving Cylinder Thickness	8 -(optional 10-12) mm
Protection Class	IP 67
Impact resistance	30.000 J
Breakout resistance	160.000 J
Operation temperature	-20 +80
Hydraulic pump	Built - in

**Optional Extras**

- ▶ Loop Dedector
- ▶ Photocell
- ▶ Button
- ▶ Remote control
- ▶ Traffic Lights (red-green)
- ▶ Traffic Lights post

**ADRESS**

Organize Sanayi Bölgesi  
9. Cad. No. 1 KARAMAN, TR

T: 0 338 224 13 60

F: 0 338 224 14 46

M: whiterose@whiterose.com.tr

W: www.whiterose.com.tr